



AURA™

PERFORMANCE HEATERS

SHADOW SERIES

ARCHITECTURALLY FOCUSED
NO -LIGHT RADIANT HEATER



Redefine your room or studio with our new no-light electric infrared heater. Featuring a sleek yet robust aluminum extruded body and long wave radiant technology, this heater is designed to take the edge off in moderate climates. A great choice for your solarium, workshop, yoga studio or semi-enclosed outdoor room, available in 3 sizes up to 3200w.

KEY FEATURES

- No-Light radiant electric heater
- Sleek design for architecturally focused environments
- Solid extruded aluminum construction
- Best for protected areas



DS15120B
1500W | 120V



DS24240
2400W | 240V




DS32240
3000W | 240V



SHADOW SERIES MODELS

						DIMENSIONS	
MODEL		WATTS	VOLTS	AMPS	BTUS	LENGTH	WIDTH
DS32240	BLACK	3200	240	13.3	10920	66" (1676mm)	8" (203mm)
		2400	208	11.5	8200		
DS24240	BLACK	2400	240	10	8200	50" (1270mm)	8" (203mm)
		1600	208	8.7	6200		
DS15120	BLACK	1500	120	12.5	5115	32" (813mm)	8" (203mm)


*240V heaters may be used at 208V. De-rating heaters reduces heater output by approximately 25%

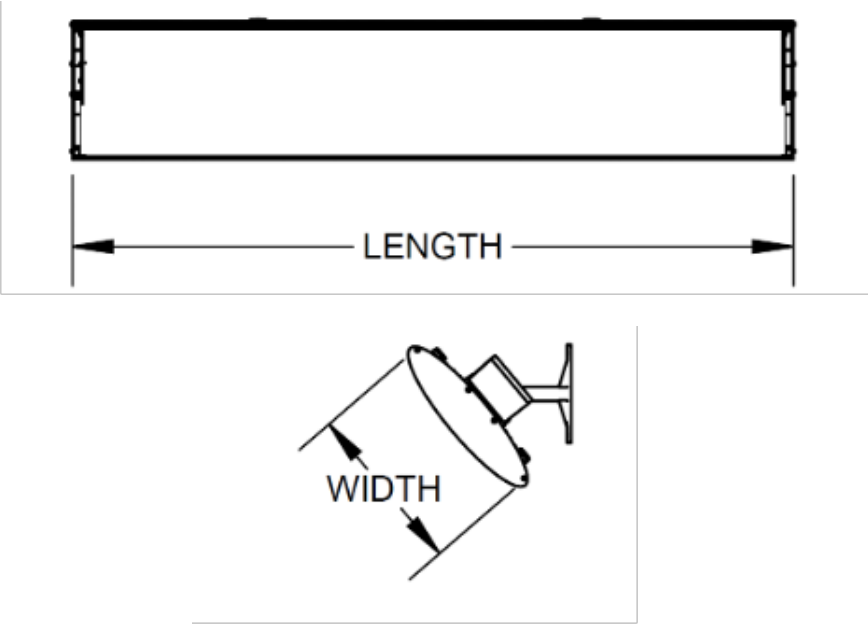

HEATING COVERAGE PATTERNS

MODEL	WIDTH	DEPTH	HEIGHT
DS32240	9' (2.7m)	7' (2.1m)	8' (2.4m)
DS24240	8' (2.4m)	6' (1.8m)	8' (2.4m)
DS15120	7' (2.1m)	6' (1.8m)	8' (2.4m)


This heater is intended for moderate climates. Heater coverage areas will be reduced in highly exposed areas. Contact dealer for specifying support.

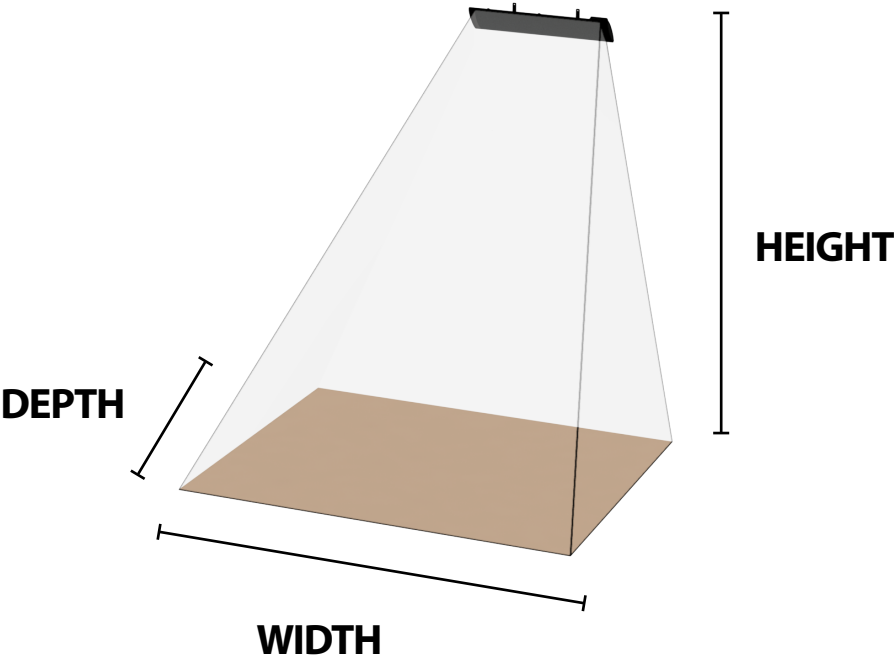

CLEARANCES AND MOUNTING OPTIONS


MODEL	FLOOR (USA)	FLOOR (CANADA)	CEILING (WALL MOUNT)	CEILING (CEILING MOUNT)	END	SIDE	MOUNTING OPTION
DS32240	6'7" (2.0m)	8' (2.4m)	8" (203mm)	4" (102mm)	18" (304mm)	24" (609mm)	WALL OR CEILING
DS24240	6'7" (2.0m)	8' (2.4m)	8" (203mm)	4" (102mm)	18" (304mm)	24" (609mm)	WALL OR CEILING
DS15120	6'7" (2.0m)	8' (2.4m)	8" (203mm)	4" (102mm)	18" (304mm)	24" (609mm)	WALL OR CEILING

WALL MOUNTED CLEARANCES

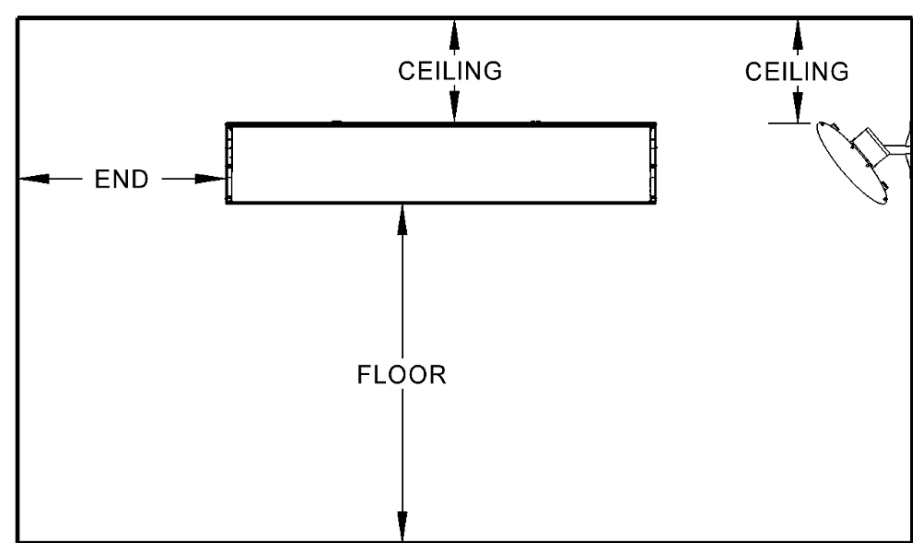

Always Maintain 6' front clearance to combustibles, keep combustibles away from the sides and rear.

CEILING SUSPENDED CLEARANCES

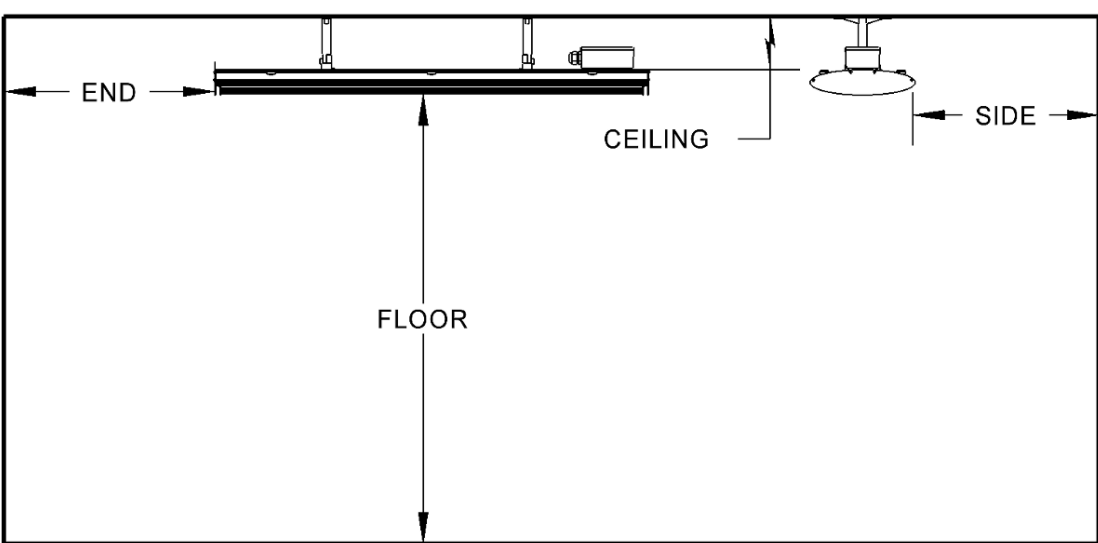

INCLUDED PARTS



ROTATIONAL MOUNTING BRACKETS

?AACQQMP6CQ



CEILING SUSPENSION POLES

12", 24" and 48" (DS12EXTB, DS24EXTB, DS48EXTB)